




HONGYUN-02
RETRACTABLE GATE
Gate Leaf Height: 1.6m

Material	Aluminum Alloy
Surface Treatment	Fluorocarbon powder coating
Product Color	CM-01 gray (customizable)
Custom Styles	From design to production, we offer full custom services

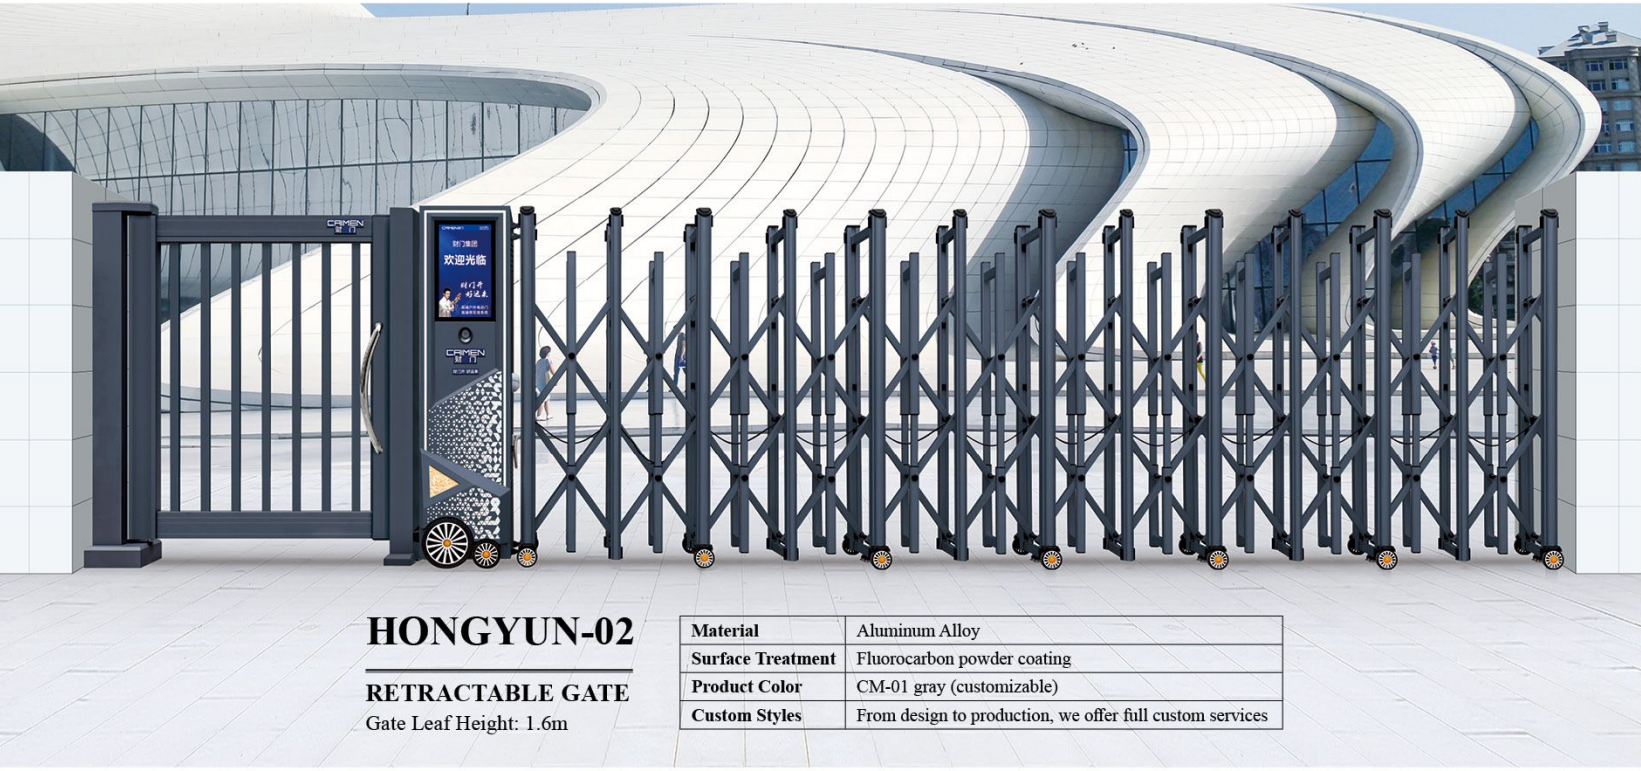

CM-S804B
AUTOMATIC BOLLARD




CM-3M-20H500
ROAD BLOCKER



TYPK-2408
ELECTRIC VILLA SWING GATE
Gate Leaf Height: 1.6m



CMXM-2305
SIDE GATE
Gate Leaf Height: 1.6m

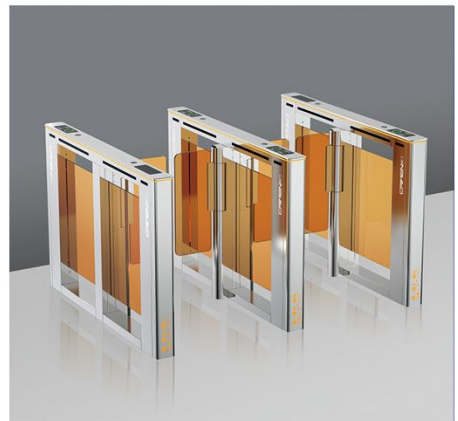

ST001
Speed Gate Turnstile
Length:1400mm Width:120mm Height:980mm



F01
FACE & CARD
VERIFICATION TERMINAL

CAIMEN

SHENZHEN CAIMEN INTELLIGENT TECHNOLOGY CO., LTD.

Address: Building 3, Zone A, No. 1, Yongda Lane, Hengling Industrial Zone, Nianfeng

Community, Pingdi Street, Longgang District, Shenzhen, China 518117

E-mail: sales@caimen.com / Website: www.caimen.com

Mobile/WhatsApp / WeChat: +86 13697478014

Warm Reminder

1. Due to printing factors, there may be slight differences between the actual product and the pictures shown. All information shall be subject to the actual product. We appreciate your understanding.
2. The product renderings in this material are for reference and appreciation only. There may be minor discrepancies between the illustrated dimensions and the actual product. Our company reserves the right to modify or discontinue the aforementioned products without prior notice.
3. For specific dimensional data related to engineering projects, please contact the manufacturer for confirmation.
4. This catalog has applied for national copyright. Legal liability will be pursued for any unauthorized use or theft of images.



CP06 License Plate Recognition Camera

Communication Mode	TCP/IP	IP Level	IP54
Input Power	220V	Custom	From design to production, we offer full custom services
Operating Voltage	12V	Custom Styles	

HJ03 Parking Cloud Terminal

Communication Mode	485/TCP	IP Level	IP54
Input Power	220V	Custom	From design to production, we offer full custom services
Operating Voltage	12V	Custom Styles	



CP03 License Plate Recognition

Communication Mode	485/TCP	IP Level	IP54
Input Power	220V	Custom	From design to production, we offer full custom services
Operating Voltage	12V	Custom Styles	

DZ01-A Barrier Gate

Operating Voltage	24V	IP Level	IPX4
Rated Power	160W	Custom	From design to production, we offer full custom services
Noise Requirements	<65dB	Custom Styles	




CP04 License Plate Recognition

Communication Mode	TCP/IP	IP Level	IP54
Input Power	220V	Custom	From design to production, we offer full custom services
Operating Voltage	12V	Custom Styles	




KS02 High Speed Barrier Gate

Impact Resistant Foam Arm & Silver Hammer Finish Powder Coating
Standard Cabinet Height: 1050mm
Max Arm Height: 938mm
Max Arm Length: ≤4000mm (including cabinet)

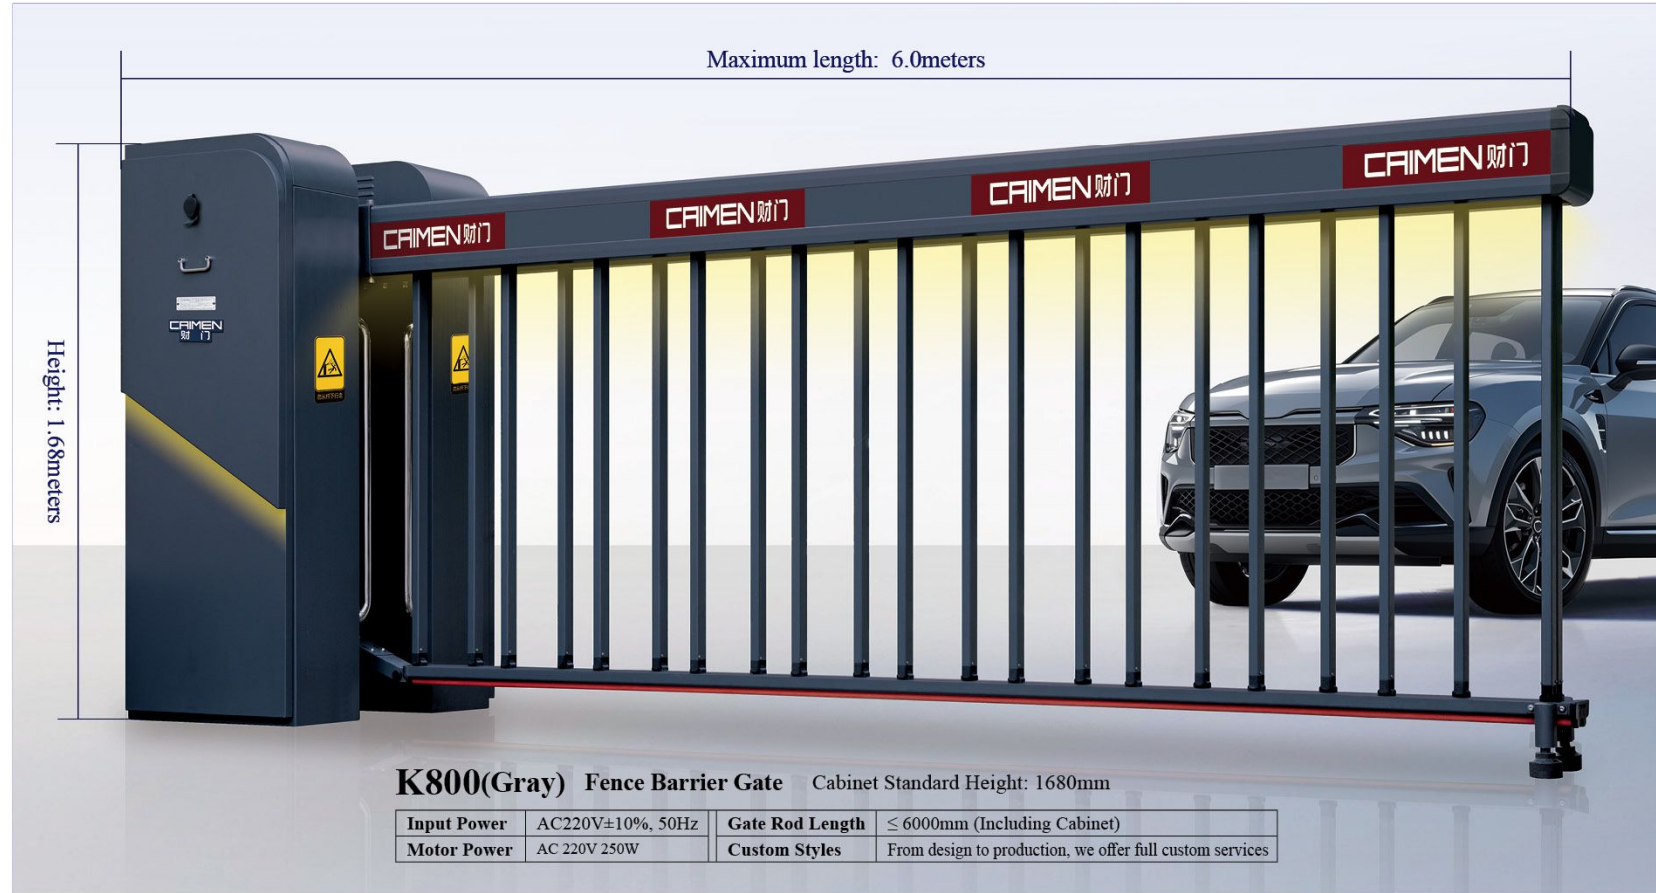

K800(Gray) Fence Barrier Gate Cabinet Standard Height: 1680mm

Input Power	AC220V±10%, 50Hz	Gate Rod Length	≤6000mm (Including Cabinet)
Motor Power	AC 220V 250W	Custom Styles	From design to production, we offer full custom services

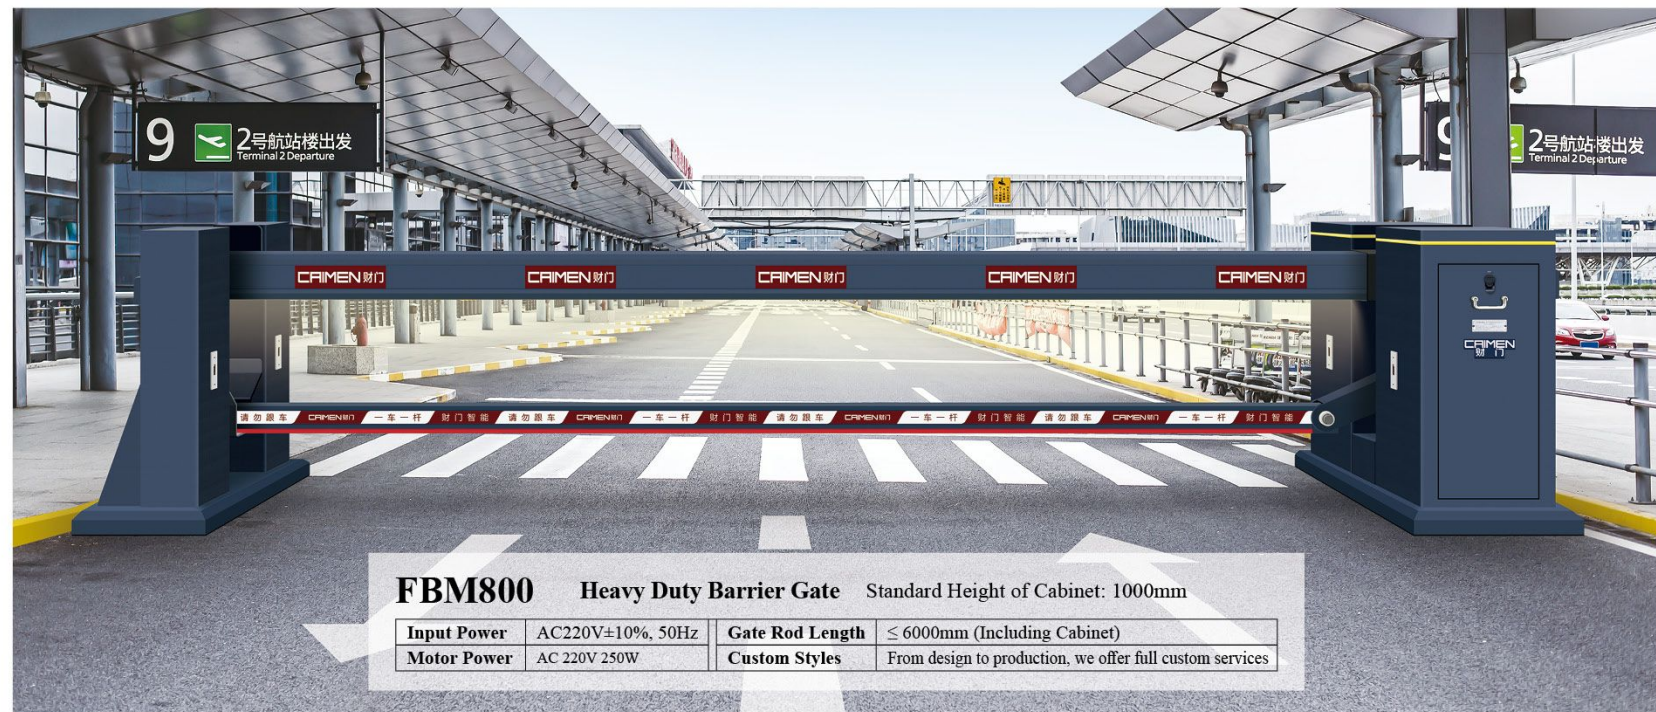

FBM800 Heavy Duty Barrier Gate Standard Height of Cabinet: 1000mm

Input Power	AC220V±10%, 50Hz	Gate Rod Length	≤6000mm (Including Cabinet)
Motor Power	AC 220V 250W	Custom Styles	From design to production, we offer full custom services



K600(Champagne Gold) Fence Barrier Gate Standard Height of Cabinet: 1665mm

Input Power	AC220V±10%, 50Hz	Gate Rod Length	≤7500mm (including Cabinet)
Motor Power	AC 220V 250W	Custom Styles	From design to production, we offer full custom services



DZ02(Gray) Fence Barrier Gate Standard Fence Height: 1080mm

Noise requirements	<65dB	Rated Power	160W
Operating Voltage	24V	Custom Styles	From design to production, we offer full custom services


CAIMEN

YOUR RELIABLE PARTNER FOR
SMART AUTO GATES & PARKING SOLUTIONS

- Professional Manufacturer of Auto Gates and Parking Barriers
- Independently Developed Smart Parking Management Software
- Reliable OEM & ODM Services with Advanced Factory and Experienced Engineers
- Creative Design Team Providing Free Customized Design Solutions



From design to production, we offer full custom services.
CAIMEN--A top Chinese manufacturer with strong reputation in auto gates and access control solutions.

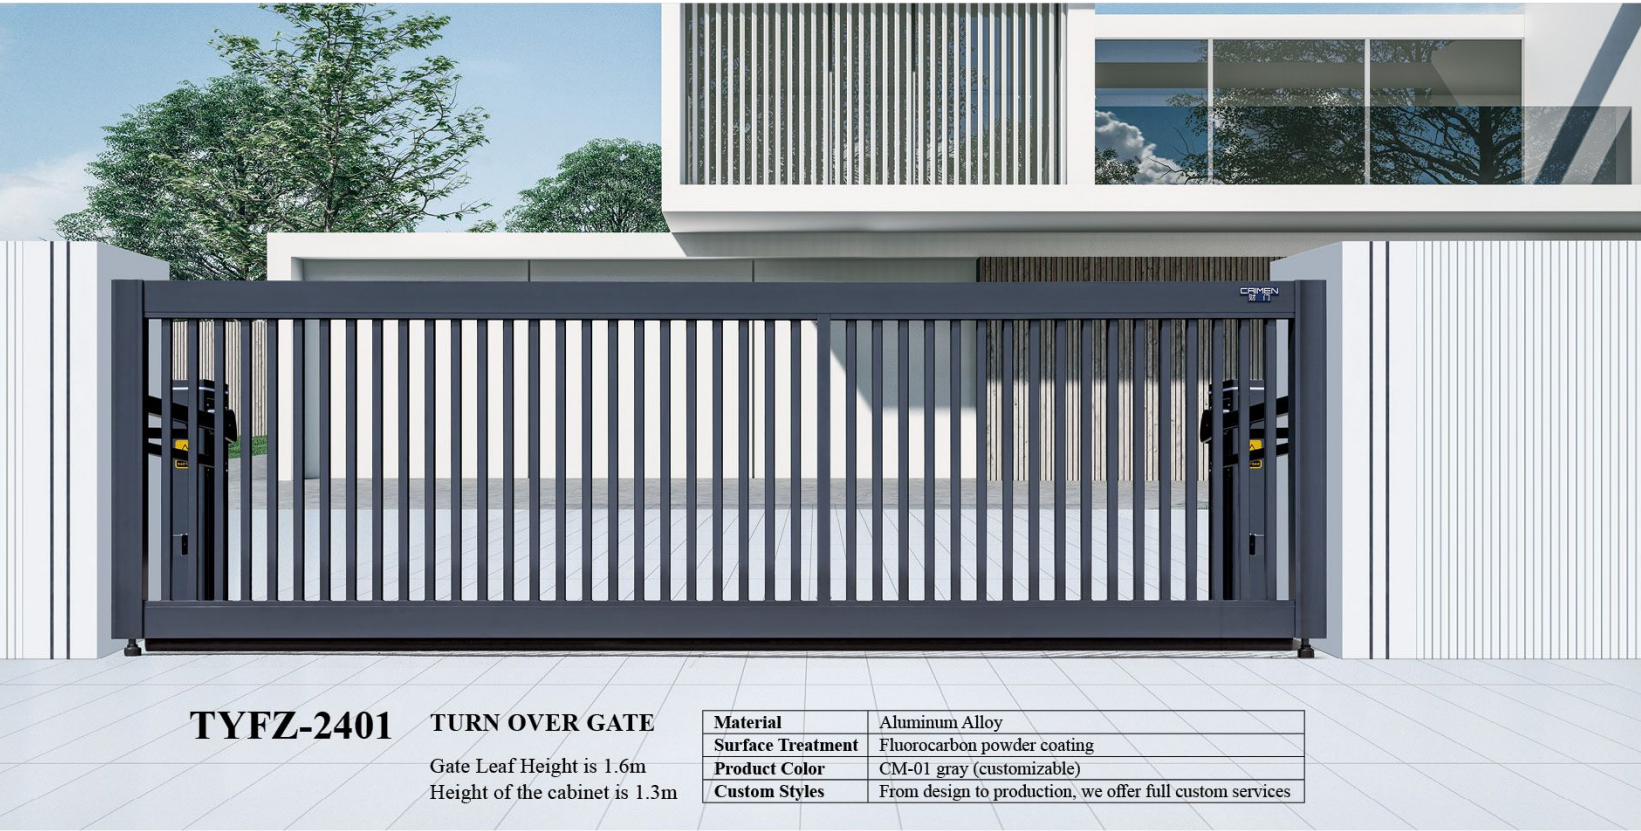

TYFZ-2401 TURN OVER GATE
Gate Leaf Height is 1.6m
Height of the cabinet is 1.3m

Material	Aluminum Alloy
Surface Treatment	Fluorocarbon powder coating
Product Color	CM-01 gray (customizable)
Custom Styles	From design to production, we offer full custom services



TYFZ-2402 TURN OVER GATE
Gate Leaf Height is 1.6m
Height of the cabinet is 1.3m

Material	Aluminum Alloy
Surface Treatment	Fluorocarbon powder coating
Product Color	CM-03 black (customizable)
Custom Styles	From design to production, we offer full custom services



Operating Environment

1. Operating Ambient Temperature: -20°C to +70°C
2. Suitable for operation in diverse environments, including high temperature, low temperature, wind, rain, ice, snow, slopes, areas above railways and areas above tracks.
3. Wind Resistance: Capable of withstanding wind forces ranging from above Level 6 to below Level 8.

Technical Parameters

1. Relative Humidity: ≤90%
2. Environmental Requirements: No strong electromagnetic interference; no severely corrosive media.
3. Power Supply Specifications:
 - . AC Voltage: 230Vac
 - . Frequency: 50/60HZ
 - . Power: 600W~120W
 - . Opening/Closing Speed: Approximately 120 seconds per cycle
 - . Thrust: 1400N~2700N



CMXF-800

CANTILEVER SLIDING GATE
Gate Leaf Height 1.7m

Material	Aluminum Alloy
Surface Treatment	Fluorocarbon powder coating
Product Color	CM-19 silver (customizable)
Custom Styles	From design to production, we offer full custom services

Motor Technical Parameters

1. Gate Operating Speed: 20 m/min
2. Power: 500 W
3. Voltage: 220 V
4. Frequency: 50 Hz
5. Current: 2.0 A
6. Rotational Speed: 1300 r/min
7. Capacitance: 18 μF / 450 VAC
8. Operating Noise: < 65 dB during operation
9. Insulation Class: Class B
10. Control Method: Wireless remote control
11. Operating Environment Temperature: -30°C to +70°C



FDXF-2001



CMXF-860



CMXF-666



CMXF-735



CMZC-01

CMZC-01

TELESCOPIC GATE
Gate Leaf Height: 1.6m

Material	Aluminum Alloy
Surface Treatment	Fluorocarbon powder coating
Product Color	CM-19 silver (customizable)
Custom Styles	From design to production, we offer full custom services

Technical Parameters


1. Working Power Supply: 220V±10%, 50-60Hz
2. Operating Environment Temperature: -20°C to +70°C
3. Relative Humidity: ≤90%
4. Gate Operating Speed: 17-18 m/min
5. Motor Rated Voltage: 220V±10V
6. Motor Rated Power: 250W / 550W
7. Motor Rated Speed: 1400 r/min
8. Motor Protection Class: IP54
9. Motor Insulation Class: Class F
10. Remote Control Distance: Max 50m (in open area)



CMZM-06



CMZM-02

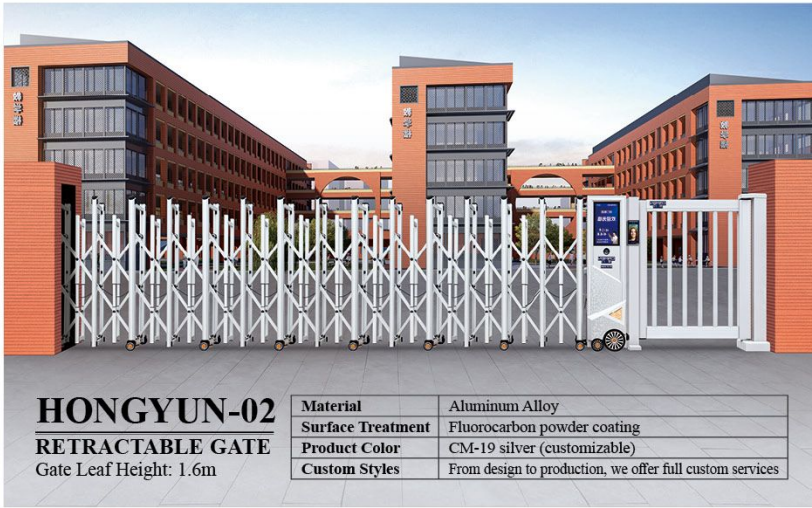

HONGYUN-02
RETRACTABLE GATE
Gate Leaf Height: 1.6m

Material	Aluminum Alloy
Surface Treatment	Fluorocarbon powder coating
Product Color	CM-19 silver (customizable)
Custom Styles	From design to production, we offer full custom services



TYZW-2101



CMZD-2102

CMZD-2102

BIFOLDING GATE
Gate Leaf Height: 2.0m

XFZD-X2

BIFOLDING GATE
Gate Leaf Height: 2.0m

Technical Parameters

1. Voltage: DC24V
2. Output Power: 120-200W
3. Current: 6A
4. Insulation Grade: Class F
5. Running Time: 6S-12S
6. Operating Life: ≥5 million times
7. Remote Control Distance: Max 50m (in open area)
8. Operating Environment Temperature: -30°C to +70°C
9. Relative Humidity: < 85%
10. Altitude: <1000M



XFZD-X2